




ITEM #4015

## 10 GALLON SELF-REFILLING WATER TANK

### SETUP AND USE INSTRUCTIONS

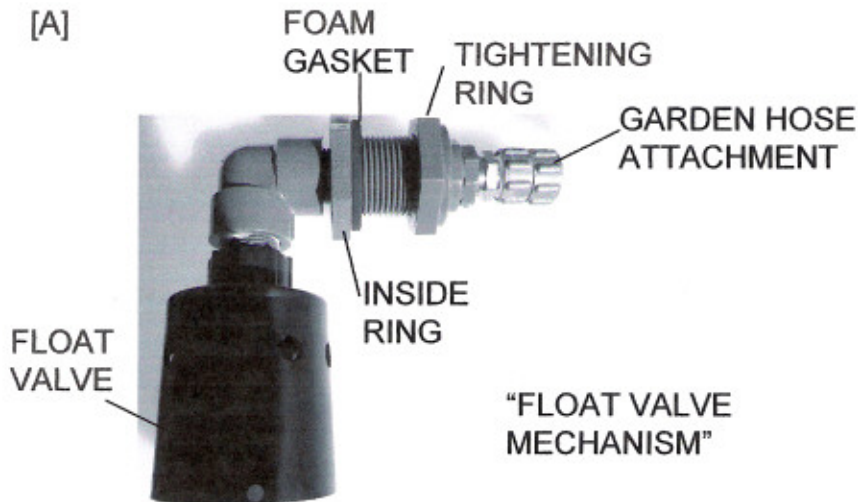

TANK WITH VALVE PROPERLY INSTALLED

The tank comes with a pre-drilled 2-inch hole. The "float valve mechanism" installs through this hole so that the float valve is on the inside, and the garden hose attachment is on the outside.

- (1) Unscrew the TIGHTENING RING and slide the black FOAM GASKET from the "float valve mechanism".
- (2) Starting from the inside of the tank, push the GARDEN HOSE ATTACHMENT end of the mechanism through the tank-side hole until the INSIDE RING is flush with the inside tank wall. The FLOAT VALVE should be inside the tank, as pictured in [A]
- (3) On the outside of the tank, install the FOAM GASKET around the mechanism, so that it is flush with the outside tank wall.
- (4) Install and tighten the TIGHTENING RING so that it presses into the FOAM GASKET to secure the whole mechanism as shown in [B]

To use, attach a garden hose to the GARDEN HOSE ATTACHMENT and turn on. The tank fills itself then stops when about half full. Place the Downpour Derby pump hoses (the ones that come out of the bottom of the pump stands) in the tank so that their ends remain underwater. The tank will refill itself as water is used playing the game.

**MAINTENANCE:** Occasionally tighten the individual mechanism components if needed.

Downpour Derby™ - Patent Pending  
© Copyright 2006 WhirlWhims LLC, Parsippany NJ 07054 USA  
Phone/fax: (973) 402-5531 email: info@Downpourderby.com